

www.cobrausa.com

Items Supplied >

- 1 SISSYBAR W/ PAD
- 2 SISSYBAR MOUNT BRACKET (L & R)
- 4 SPACERS
- 2 M8 X 45mm BUTTONHEAD BOLTS
- 2 M8 X 55mm BUTTONHEAD BOLTS
- 4 M8 X 16mm BUTTONHEAD BOLTS

2011-2018


Instruction Manual >

02-4770 / 02-5270 / 02-5770

Page 1 of 1

Read all instructions carefully before installing your new Cobra product! Your formed luggage rack will install in just a few minutes using common tools.

- Remove and discard the (2) M8 bolts from the left side fender rail.
- 2. Install left sissybar mount bracket (part # facing inward) by inserting the longer supplied M8 x 55mm bolt through the front hole, supplied spacer, and thread into the fender rail. Insert the shorter supplied M8 x 45mm bolt through the rear hole, supplied spacer and into the fender rail. **DO NOT TIGHTEN** AT THIS TIME.
- 3. Repeat Steps 1 & 2 on right side.
- 4. Align the sissybar and insert the (4) supplied M8 x 16mm bolts. Tighten the (4) M8 bolts on the fender rails followed by the (4) M8 x 16mm bolts. Torque all bolts to their appropriate values.

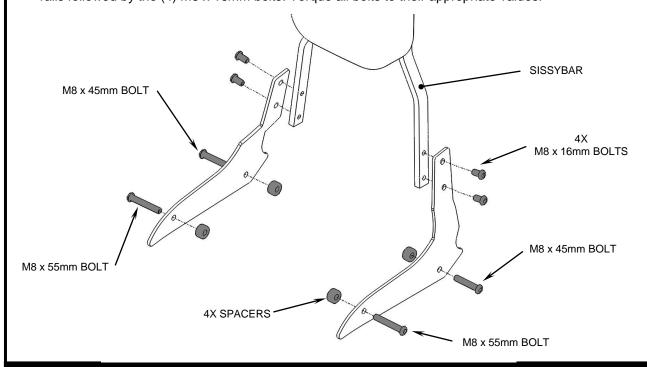

*Cobra® recommends you always wear a helmet while riding. Please never operate your motorcycle while under the influence of alcohol and/or drugs. Enjoy the new look of your motorcycle and please ride safely.