

## Items Supplied >

- 1 – FORMED RACK
- 1 – BUTTONHEAD BOLT M6 X 12mm
- 1 – RUBBER WASHER

## Application(s) >

HONDA VTX1300 FURY 2010-2019

## Instruction Manual >

02-4133

Page 1 of 1

**Your luggage rack will install in just a few minutes using common tools. Read all instructions carefully and completely before installing your new luggage rack.**

1. Remove passenger seat by removing the two side mounted bolts and the single bolt at the rear that attaches to the fender. Note: Push the leather and foam away to gain access to the rear bolt.
2. Remove and save the two bolts at the rear of the rider's seat to detach from fender. Note: Push the leather and foam away from bolts to gain access. Slide the seat back to release and remove.
3. On the underside of the rider seat remove and save the two bolts that secure the passenger seat bracket. See Figure 1.
4. Install the rack in place of the passenger seat bracket and secure with the two bolts from Step 3. See Figure 2.
5. Reinstall the seat (with rack) with the two stock bolts removed in Step 2 into the original locations.
6. Place the supplied rubber washer under the rear mount hole of the rack. Insert the supplied M6 x 12mm bolt through the rack, rubber washer and into the fender.
7. Tighten the seat bolts firmly to the original factory torque values. Tighten rack bolt firmly to compress rubber washer slightly. Check tightness periodically.

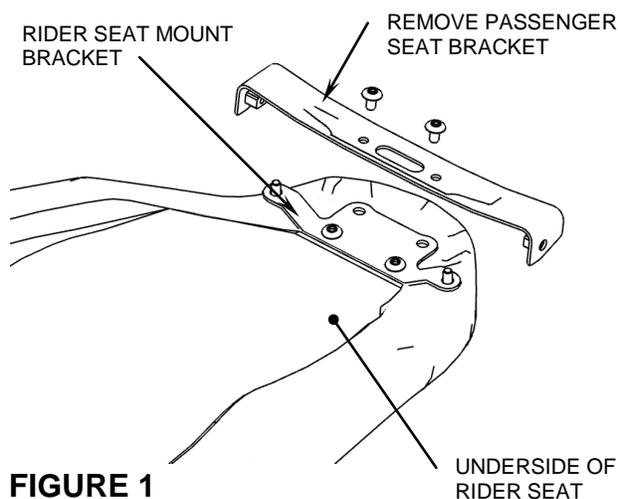


FIGURE 1

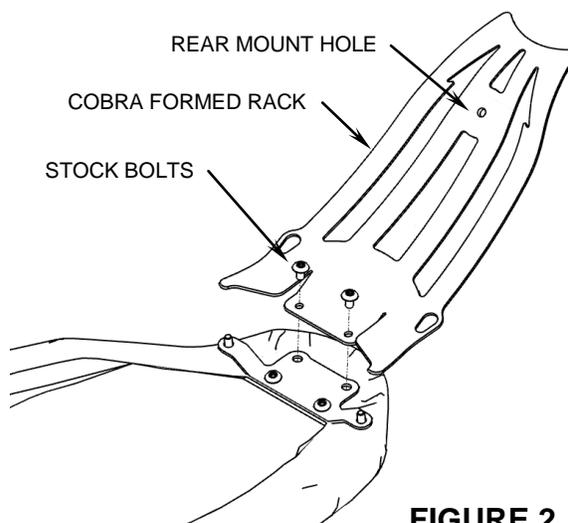


FIGURE 2

**\* Cobra® recommends you always wear a helmet while riding. Please never operate your motorcycle while under the influence of alcohol and/or drugs. Enjoy the new look of your motorcycle and please ride safely.**