

Thank you for purchasing this Cobra Dynojet kit. This kit has been developed for a motorcycle which is set to the parameters listed at the right in the "Stage" description. If your motorcycle does not meet any of these parameters please check with Dynojet before installation. For technical assistance contact your Dynojet distributor or call Dynojet U.S.A. (800)-992-4993

Cobra Engineering
 23801 E. La Palma Ave.
 Yorba Linda, CA. 92887
 TEL: 714-692-8180
 FAX: 714-692-5016

Website Address
<http://www.dynojet.com>

The manufacturer and seller make no warranties express or implied which extend beyond the description of the goods contained herein. Any description of this product is for the purpose of identifying it and shall not be deemed to create an express warranty.

COBRA[®]
Anything's Possible


92-1273

U.S Models Only

2000-2007 Honda VT1100 Sabre

Stage 1

For mildly tuned machines using the stock airbox, with stock filter and Cobra Boulevard exhaust system

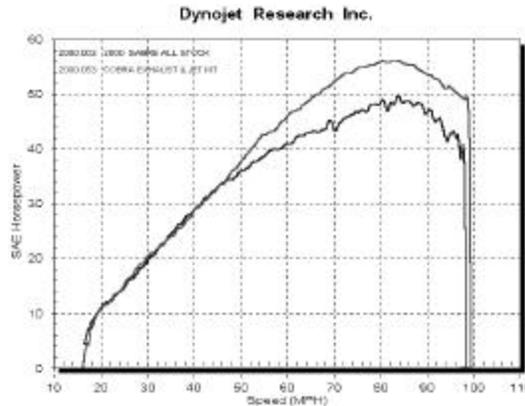

This graph shows a typical gain with a Cobra jet kit.

WARNING

**NO SMOKING!
 NO OPEN FLAME!
 WHILE INSTALLING
 YOUR DYNOJET KIT**

Parts List

1	Main Jet	DJ160
1	Main Jet	DJ165
1	Main Jet	DJ170
1	Main Jet	DJ175
2	Fuel Needles	DNO131
2	E-Clips	DE0001
2	Adjusting Washers	DW0001
2	Slide Springs	DSP012
1	Plug Drill	DD #5/32
1	Screw	DS0001


*For racing use only. Not for sale in the State of California.

STAGE ONE INSTRUCTIONS

COBRA

92-1273

1. Remove vacuum slides from carbs. Remove stock needles and spacers, noting order of assembly (Fig. A).
2. Install the Cobra needles on groove #3 from the top. Use all stock spacers (Fig. A). Install the small Cobra washers above the E-clip. **NOTE:** It may be necessary to cut off the top two grooves of the needle to reinstall the stock needle retainer. After installing the slides in the carbs be sure to check slide movement manually.
3. Install the Cobra slide springs (DSP012) in place of the stock slide springs.
4. Remove the stock main jets and replace with the Cobra main jets provided. If running **WITH** baffles use the DJ165 main jet in the front cylinder and the DJ170 main jet in the rear cylinder. When running **WITHOUT** baffles use the DJ170 main jet in the front cylinder and the DJ175 main jet in the rear cylinder. Be sure that the jet you are changing is the main jet.

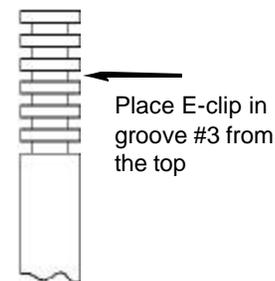

5. Locate the fuel mixture plug (Fig. B). If you see a screw head at Fig. B proceed to the adjusting procedure. With the 5/32 drill bit provided, carefully drill through the plugs. **NOTE:** The mixture screw is directly underneath this plug, be ready to pull back on the drill the instant you break through. Use the screw provided to secure and remove this plug. Carefully turn the mixture screws clockwise until lightly seated then turn out 3.5 turns.

Fig. A

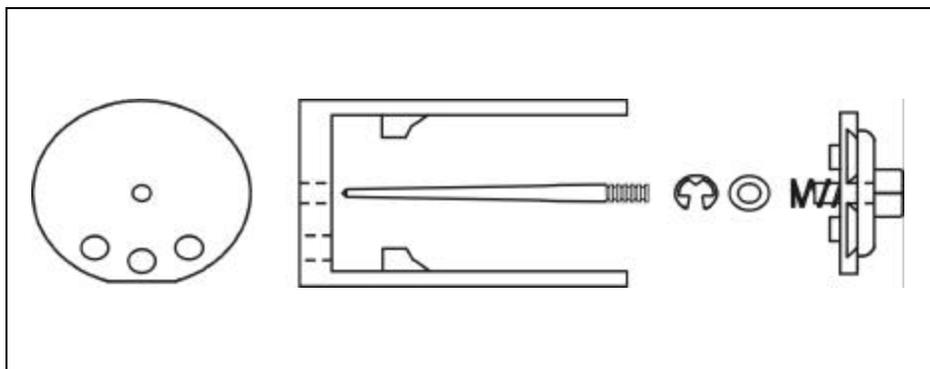


Fig. B

