TM 23801 E. La Palma Ave., Yorba Linda, Ca 92887 Ph. 714.692.8180 Fax. 714.692.5016

Items Supplied >	Application(s) >	www.cobrausa.con
 1 - Right Floorboard Assembly 1 - Left Floorboard Assembly 2 - Long Black Spacers 2 - Medium Black Spacers 2 - Short Black Spacers 	HONDA SPIRIT 750 01-07	
Instruction Manual >	06-1617/06-4117	Page 1 of 1
Your Floorboards will install in just a fe and completely before installing your r	ew minutes using common tools. Read all instructionew Floorboards.	ons carefully
 Remove your stock footpeg mour 	nts. Note: Save stock hardware for installation of ne	ew floorboard

- 2. If you **have the Cobra Freeway bar installed** (see figure 1), starting on the left side of the motorcycle insert the stock bolt thru the lower hole in the floorboard mount, supplied short spacer, freeway bar mount and into the frame. On the upper mounting hole, insert the stock bolt thru the floorboard mount, freeway bar short spacer, supplied short spacer and into the frame. On the right side of the motorcycle insert the stock bolt thru the lower hole in the floorboard mount, supplied medium spacer, freeway bar mount and into the frame. On the upper mounting hole, insert the stock bolt thru the floorboard mount, supplied medium spacer, freeway bar mount and into the frame. On the upper mounting hole, insert the stock bolt thru the floorboard mount, supplied medium spacer, freeway bar short spacer and into the frame. The supplied long spacers are not used.
- 3. If you **do not have the Cobra Freeway bar installed** (see figure 2), starting on the left side of the motorcycle insert the stock bolt thru the lower hole in the floorboard mount, supplied medium spacer and into the frame. On the upper mounting hole, insert the stock bolt thru the floorboard mount, supplied medium spacer, and into the frame. On the right side of the motorcycle insert the stock bolt thru the lower hole in the floorboard mount, supplied long spacer and into the frame. On the upper mounting hole, insert the stock bolt thru the lower hole in the floorboard mount, supplied long spacer and into the frame. On the upper mounting hole, insert the stock bolt thru the floorboard mount, supplied long spacer and into the frame. The supplied short spacers are not used.

4. Tighten all bolts to factory torque specifications.

•] =] =] =] 4

assemblies.


* Cobra recommends you always wear a helmet while riding. Please never operate your motorcycle while under the influence of alcohol and/or drugs. Enjoy the new look of your motorcycle and please ride safely.

OCUMENT NO 0017

REV B

23801 E. La Palma Ave., Yorba Linda, Ca 92887 Ph. 714.692.8180 Fax. 714.692.5016

www.cobrausa.com

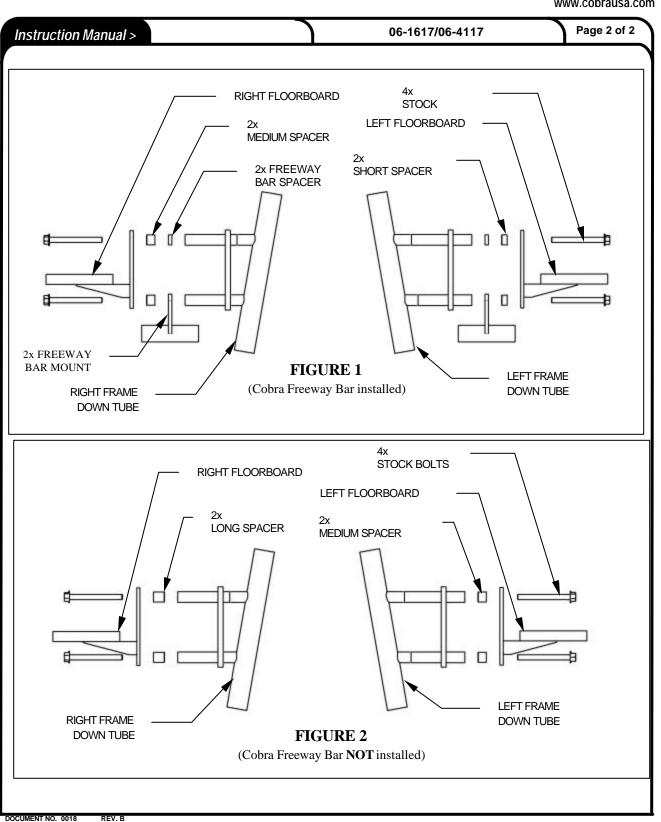

0